



Multi Zone Specification

ASU9RMLQ Multizone Wall Mount

THE POSSIBILITIES ARE INFINITE

Job Name: _____
 Location: _____
 Engineer: _____
 Submitted to: _____
 Submitted by: _____
 Reference: _____

Approval: _____
 Date: _____
 Construction: _____
 Unit #: _____
 Drawing #: _____


| | | |
|----------------------|------------------|----------------------------|
| Power | V/Hz/P | 230/60/1 |
| Fan type | | Cross Flow |
| No. Motors | (W) | 42-1 |
| CFM | (Hi,Me,Lo,Qu) | 312/271/224/194 |
| Sound Pressure Level | db (Hi,Me,Lo,Qu) | 37/33/27/24 |
| F.L. A. | (A) | .2 |
| Refrigerant | | 410A |
| O.D. Discharge | in (mm) | 1/4"(6.35) |
| O.D. Suction | in (mm) | 3/8"(9.52) |
| Dimensions | | H x W x D |
| Uncrated | (in) | 11-5/32 x 31-3/32 x 9-1/16 |
| | (mm) | (283x790x230) |
| Crated | (in) | 12-7/16 x 32-7/8 x 14-3/16 |
| | (mm) | (316x835x360) |
| Weight | | |
| Net | lbs. (kg) | 20(9.5) |
| Gross Shipping | lbs. (kg) | 26 (12) |

| | | |
|----------------------------------|------------|---------------------------|
| Cooling Capacity | (BTU/h) | 9,500 (5,100-11,300) |
| Moisture Removal | pt/h (l/h) | 1.7 (.8) |
| Heating Capacity | (BTU/h) | 11,000 (5,100-13,000) |
| Temperature Setting Range | | |
| Cooling | °F(°C) | 64~90 (18~32) |
| Heating | °F(°C) | 60~80 (16~31) |
| Drain Pipe Size | OD in (mm) | Ø5/8 (16) |
| | ID in (mm) | Ø9/16 (14) |
| Remote Control Type | | Wireless (Wired Optional) |
| Electrical Connection* | AWG | 14/3 with ground |


*Power and communication are fed from the outdoor unit.



Unit : in. (mm)

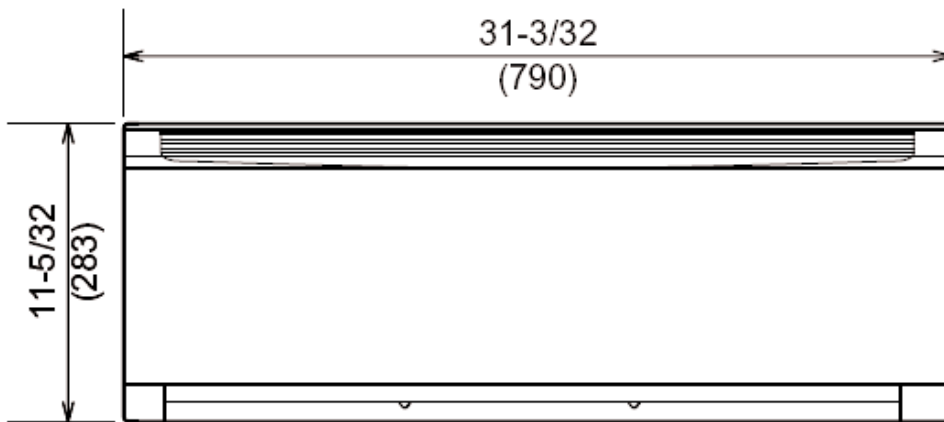

Front view

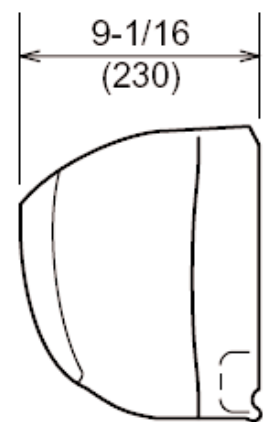

Side view

Fujitsu General America, Inc.
 Fairfield, NJ 07004
 Toll Free: 1-888-888-3424
 Fax: (973) 836-0447
 www.fujitsugeneral.com

Note:
 Specifications are based on the following conditions.
 Power source of specifications : 230V
 Cooling: Indoor temperature of 80°F(26.67°C)DB / 67°F(19.44°C)WB, and outdoor temperature of 95°F(35°C)DB/75°F(23.89°C)WB.
 Heating: Indoor temperature of 70°F(21.11°C)DB / 60°F(15.56°C)WB, and outdoor temperature of 47°F(8.33°C)DB/43°F(6.11°C)WB.
 Pipe length : 24ft. 7in.(7.5m),Height difference : 0 ft.(0m) [Outdoor unit - Indoor unit]
 Fujitsu products are subject to continuous improvements. Fujitsu reserves the right to modify product design, specifications and information in this data sheet without notice and without incurring any obligations.