

# SUBMITTAL DATA: 30RLXQ ASU30RLXQ & AOU30RLXQ



Job Name:	Location:
Purchaser:	
Engineer:	
Submitted To:	For:    Reference    Approval    Construction
Submitted By:	

## OUTLINE AND DIMENSIONS

### Capacities:

Cooling	30,600 BTU/h
Min/Max Cooling	9,900-32,400 BTU/h
Outdoor Design Temperature F° DB/WB	95/75
Heating	32,000 BTU/h
Min/Max Heating	7,500-37,500 BTU/h
Outdoor Design Temperature F° DB/WB	47/43
HSPF	9.5
SEER	15
EER Cooling/Heating	7.9/10.7
Low Ambient Temp. F° Cooling/Heating	0/0
Voltage/Frequency/Phase	208-230/60/1

### Indoor Unit:

Noise Level Cooling db (A) - H/ M/ L/ Q	49/44/39/34
Noise Level Heating db (A) - H/ M/ L/ Q	49/44/39/36
Weight	31 lbs.


### Outdoor Unit:

Noise Level db (A) - Cooling/Heating	54/55
Recommended Fuse Size	30A
Min. Ampacity	22A
Running Current Cooling (Rated/Max)	17.0/18.5
Running Current Heating (Rated/Max)	13.2/18.5
Weight	137 lbs.

### Refrigerant Piping:

Max Ht. Difference	98 ft.
Max Total or Combined Length	164 ft.
Discharge Vapor Line (O.D.)	3/8 in.
Suction (O.D.)	5/8 in.

**Note: Figures are based on 230 Volts**

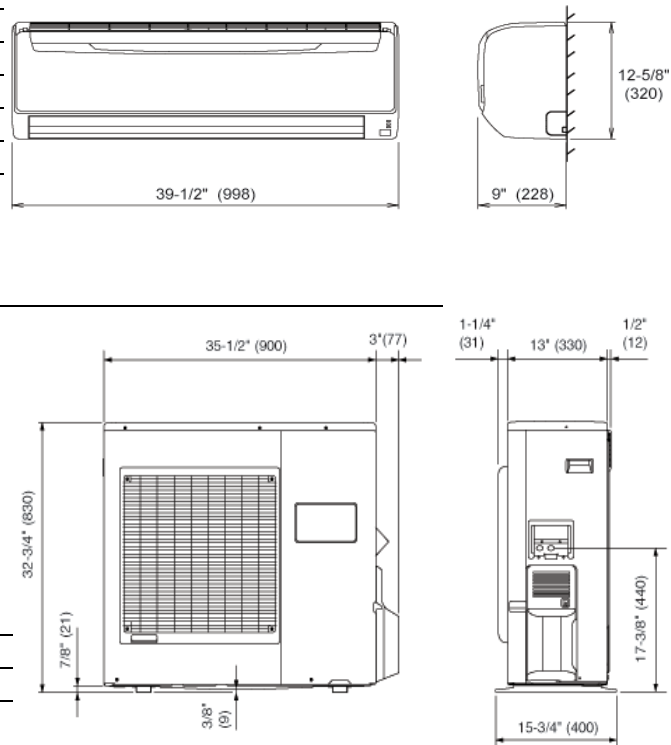

### Standard Features:

- Six year compressor warranty
- Two year parts warranty
- Refrigerant R410A
- Auto Louver: 4 Way
- Auto/Quiet/Dry Mode
- Plasma Filter
- Digital Wireless Remote Control
- Sleep timer; 24 hour timer
- Built in Low Ambient
- Auto Restart/Reset
- Cold Prevention
- Power Diffuser
- Long linset length's
- Optional Wired Remote

### Notes:

---



---



---