

# Submittal Data: System 36RCLX AUU36RCLX & AOU36RLX



Job Name: \_\_\_\_\_ Location: \_\_\_\_\_

Purchaser: \_\_\_\_\_

Engineer: \_\_\_\_\_

Submitted To: \_\_\_\_\_ For:  Reference  Approval  Construction

Submitted By: \_\_\_\_\_

## Capacities:

Cooling	34,100 BTU/h
Min/Max Cooling	8,500-36,000BTU/h
Outdoor Design Temperature <i>F° DB/WB</i>	95/75
Heating	36,000 BTU/h
Min/Max Heating	9,200-42,700BTU/h
Outdoor Design Temperature <i>F° DB/WB</i>	47/43
HSPF	8.5
SEER	14.0
EER <i>Cooling/Heating</i>	8.1/9.7
Low Ambient Temp. <i>F° Cooling/Heating</i>	0/14
Voltage/Frequency/Phase	208-230/60/1

## Indoor Unit:

Noise Level Cooling <i>db (A) - H/ M/ L</i>	48/45/41
Noise Level Heating <i>db (A) - H/ M/ L</i>	48/45/31
Weight	82 lbs.
Total Height	9-3/4 in.
Space required above ceiling	8-1/2in.

## Outdoor Unit:


Noise Level <i>db (A) - Cooling/Heating</i>	54/55
Recommended Fuse Size	30A
Min. Ampacity	23A
Running Current Cooling ( <i>Rated/Max</i> )	18.3/18.8
Running Current Heating ( <i>Rated/Max</i> )	16.2/18.8
Weight	141 lbs.

## Refrigerant Piping:

Max Ht. Difference	98 ft.
Max Total or Combined Length	165 ft. each
Discharge Vapor Line (O.D.)	3/8 in.
Suction (O.D.)	5/8 in.

**Note: Figures are based on 230 Volts**

## OUTLINE AND DIMENSIONS

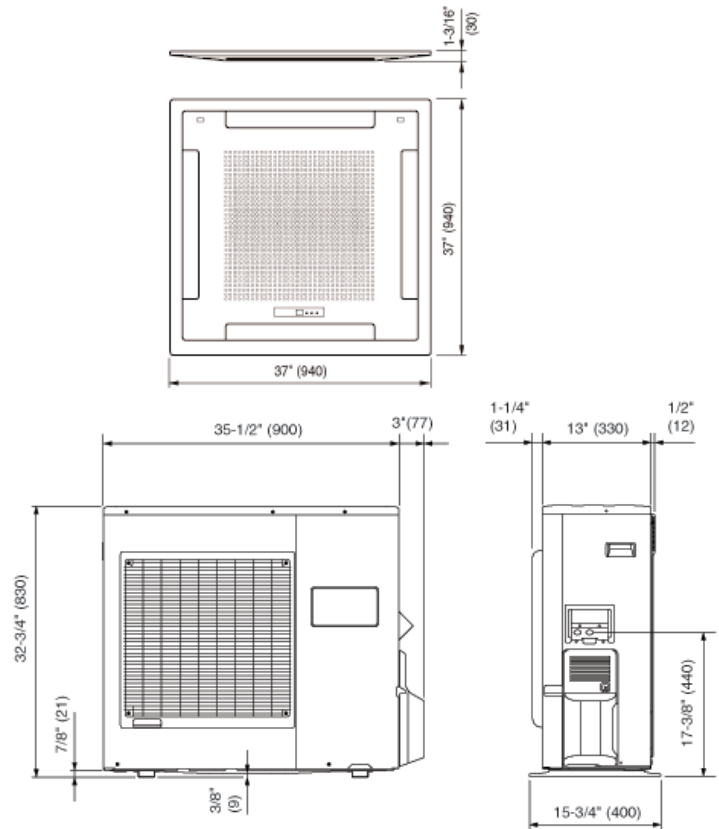

## Standard Features:

- ◆ Six year compressor warranty
- ◆ Two year parts warranty
- ◆ Weekly timer
- ◆ Auto Louver: Up/Down
- ◆ Energy saver; Slender Fit
- ◆ Pump Down Operation
- ◆ Full Function Wired Remote Control
- ◆ Cold Prevention
- ◆ Built in Low Ambient
- ◆ Auto Restart/ Reset
- ◆ Refrigerant R410A
- ◆ High Ceiling Mode
- ◆ Branch Duct Capable
- ◆ Auto Mode; Quiet Mode; Dry Mode

## Notes:

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_