

Submittal Data: System 9R2 ASU9R2 & AOU9R2



Job Name: _____ Location: _____

Purchaser: _____

Engineer: _____

Submitted To: _____ For: Reference Approval Construction

Submitted By: _____

Unit Designation: _____ Schedule No. _____ Model No.: _____

Capacities:

Cooling	9,700 BTU/h
Outdoor Design Temp. <i>F° DB/WB</i>	95/75
Heating	9,600 BTU/h
Outdoor Design Temp. <i>F° DB/WB</i>	47/43
HSPF	8.2
SEER	14.3
EER <i>Cooling/Heating</i>	11.8/13.9
Voltage/Frequency/Phase	115/60/1

Indoor Unit:

Noise Level Cooling <i>db (A) - H/ M/ L/ Q</i>	40/ 36/ 31/ 26
Noise Level Heating <i>db (A) - H/ M/ L/ Q</i>	38/ 34/ 29/ 25
Weight	21 lbs.

Outdoor Unit:

Noise Level <i>Cooling/Heating</i>	43/45
Recommended Fuse Size	15A
Min. Ampacity	12A
Running Current <i>Cooling</i>	7.6A
Running Current <i>Heating</i>	6.5A
Weight	71 lbs.

Refrigerant Piping:

Max Ht. Difference	26 ft.
Max Total or Combined Length	49 ft.
Discharge Vapor Line (O.D.)	1/4 in.
Suction (O.D.)	3/8 in.


Fan Type:

CFM Cooling (Hi,Me,Lo,Qu)	324/271/241/200
CFM Heating (Hi,Me,Lo,Qu)	324/283/247/200

Operating Temperatures:

Cooling °F	32~115
Heating °F	18~75

OUTLINE AND DIMENSIONS

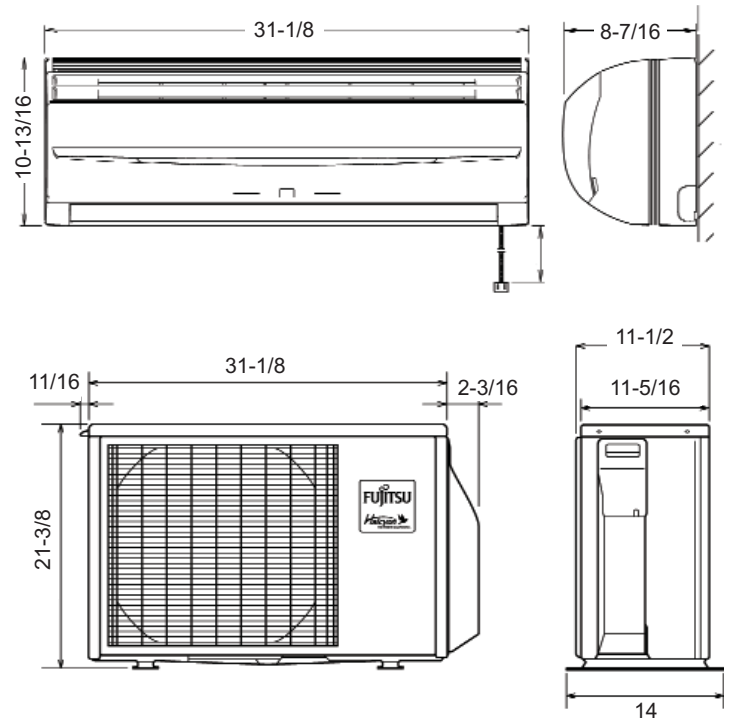

Standard Features:

- ◆ Seven year compressor warranty
- ◆ Five year parts warranty
- ◆ Digital wireless remote control
- ◆ 2-way automatic louvers
- ◆ Minimum Heat (50°F heating set point)
- ◆ Built in Low Ambient
- ◆ Auto Restart/ Reset
- ◆ Sleep timer
- ◆ Optional Wired Remote Control
- ◆ Dry mode
- ◆ Refrigerant R410A
- ◆ Quiet Mode

Notes:
