



# Single Split Submittal Data:

*FTXG15HVJU Indoor Unit*  
*RXG15HVJU Outdoor Unit*

Job Name: \_\_\_\_\_ Location: \_\_\_\_\_

Purchaser: \_\_\_\_\_

Engineer: \_\_\_\_\_

Submitted To: \_\_\_\_\_ For:  Reference  Approval  Construction

Submitted By: \_\_\_\_\_ Date: \_\_\_\_\_

Unit Designation: Schedule #: \_\_\_\_\_ Model No.: \_\_\_\_\_

**Capacities & Efficiencies:**

Cooling Rated (Min. ~ Max.)	15,000 (5,300 ~ 18,000) Btu/h
Seasonal Energy Efficiency Ratio	21.0 SEER
Moisture Removal	4.80 Pt/h
Heating Rated (Min. ~ Max.)	18,000 (4,400 ~ 21,200) Btu/h
Heating Seasonal Performance Factor	10.0 HSPF
<b>Cooling Mode Nominal Conditions:</b>	<b>Heating Mode Nominal Conditions:</b>
Indoor: 80°F DB / 67°F WB	Indoor: 70°F DB / 60°F WB
Outdoor: 95°F DB / 75°F WB	Outdoor: 47°F DB / 43°F WB
Pipe Length: 25 ft	Pipe Length: 25 ft



**Indoor Unit:**

Power Supply (V/PH/Hz)	208-230/1/60
Cooling Airflow Rate (H/M/L)	487/371/258 cfm
Heating Airflow Rate (H/M/L)	494/392/293 cfm
Running Current (Cooling/Heating)	0.15 Amps / 0.16 Amps
Weight	31 lbs
Sound Pressure Level – Cooling (H/M/L)	45/37/29 dBA
Sound Pressure Level - Heating (H/M/L)	44/38/31 dBA

**Outdoor Unit:**

Power Supply (V/PH/Hz)	208-230/1/60
Cooling Operating Range	14°F – 109°F DB
Heating Operating Range	-4°F WB - 75°F WB -4°F DB - 75°F DB
Humidity Setpoint Range	45% - 60% RH
Minimum Circuit Amps (MCA)	14.5 Amps
Maximum Fuse Amps (MFA)	15 Amps
Starting Current	4.9 Amps
Running Current (Cooling/Heating)	5.49 Amps / 6.20 Amps
Weight	99 lbs
Sound Pressure Level (Cooling/Heating)	50/50 dBA

**Piping:**

Maximum Height Difference	26 ft
Maximum Length	33 ft
Liquid Piping Connection (OD)	φ1/4"
Gas Piping Connection (OD)	φ3/8"
Condensate Drain Piping Connection (OD)	φ11/16"

**Standard Features:**

U.S. Compressor Warranty	7 years
U.S. Parts Warranty	5 years
U.S. Limited Labor Warranty	1 year
Flash Streamer Air Purifier	
Wireless Remote Control	

**Options:**


Titanium Apatite Photocatalytic Air Purifying & Deodorizing Filter	
Centralized Control/Unified On-Off/Scheduled Timer	
Air Direction Adjustment Grill	
Remote Controller Loss Prevention Kit	
Drain Plug	




**R-410A**



**FTXG15HVJU**

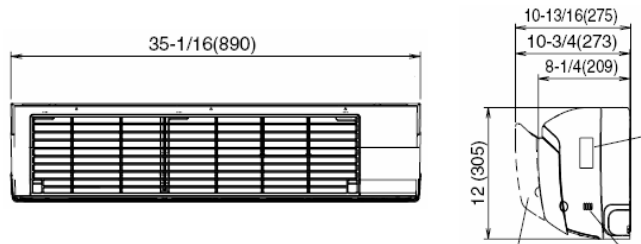

**RXG15HVJU**

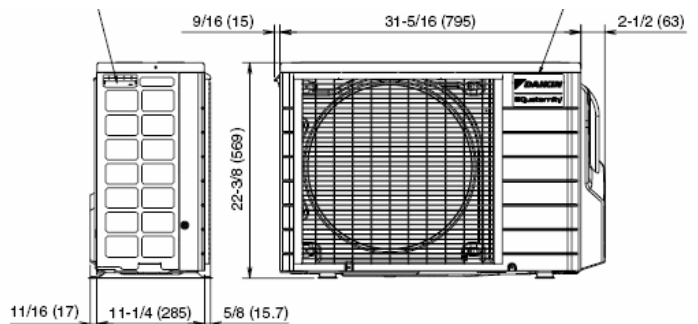

**Daikin AC (Americas), Inc. ♦ 1645 Wallace Drive – Suite 110 ♦ Carrollton, TX 75006**

SDS FTXG15HVJU\_RXG15HVJU 12-08

www.daikinac.com

*(Daikin's products are subject to continuous improvements. Daikin reserves the right to modify product design, specifications and information in this data sheet without notice and without incurring any obligations)*