

SUBMITTAL DATA: 24RLXQ ASU24RLXQ & AOU24RLXQ



Job Name:	Location:
Purchaser:	
Engineer:	
Submitted To:	For : Reference Approval Construction
Submitted By:	

OUTLINE AND DIMENSIONS

Capacities:

Cooling	24,200 BTU/h
Min/Max Cooling	9,900-27,300 BTU/h
Outdoor Design Temperature F° DB/WB	95/75
Heating	27,600 BTU/h
Min/Max Heating	7,500-36,200 BTU/h
Outdoor Design Temperature F° DB/WB	47/43
HSPF	10
SEER	17
EER Cooling/Heating	11.1/11.6
Low Ambient Temp. F° Cooling/Heating	0/0
Voltage/Frequency/Phase	208-230/60/1

Indoor Unit:

Noise Level Cooling db (A) - H/ M/ L/ Q	49/44/39/34
Noise Level Heating db (A) - H/ M/ L/ Q	49/44/39/35
Weight	31 lbs.





Outdoor Unit:

Noise Level db (A) - Cooling/Heating	54/55
Recommended Fuse Size	30A
Min. Ampacity	22A
Running Current Cooling (Rated/Max)	9.6/15
Running Current Heating (Rated/Max)	10.5/15.5
Weight	137 lbs.

Refrigerant Piping:

Max Ht. Difference	98 ft.
Max Total or Combined Length	164 ft.
Discharge Vapor Line (O.D.)	3/8 in.
Suction (O.D.)	5/8 in.

Note: Figures are based on 230 Volts

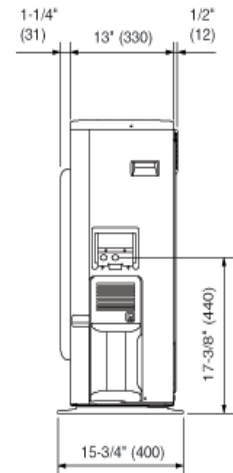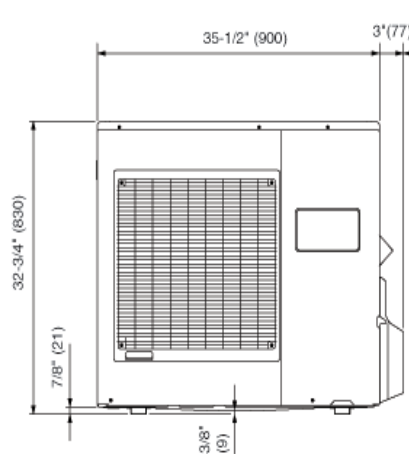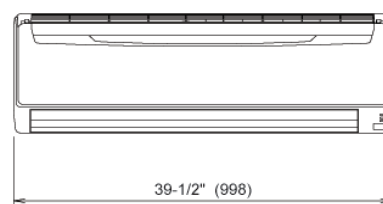

Standard Features:

- Six year compressor warranty
- Two year parts warranty
- Refrigerant R410A
- Auto Louver: 4 Way
- Auto/Quiet/Dry Mode
- Plasma Filter
- Digital Wireless Remote Control
- Sleep timer; 24 hour timer
- Built in Low Ambient
- Auto Restart/Reset
- Cold Prevention
- Power Diffuser
- Long linset length's
- Optional Wired Remote

Notes:
